

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number  
**WO 2005/085394 A1**

(51) International Patent Classification<sup>7</sup>: **C10G 65/12,**  
45/64

Anthony [NL/FR]; Route departementale No. 3, F-76650  
Petit Couronne (FR). STEENGE, Wiecher Derk Evert  
[NL/NL]; Badhuisweg 3, NL-1031 CM Amsterdam (NL).

(21) International Application Number:

PCT/EP2005/050860

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 1 March 2005 (01.03.2005)

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:


04290570.3 2 March 2004 (02.03.2004) EP

Published:

— with international search report

[Continued on next page]

(54) Title: PROCESS TO CONTINUOUSLY PREPARE TWO OR MORE BASE OIL GRADES AND MIDDLE DISTILLATES

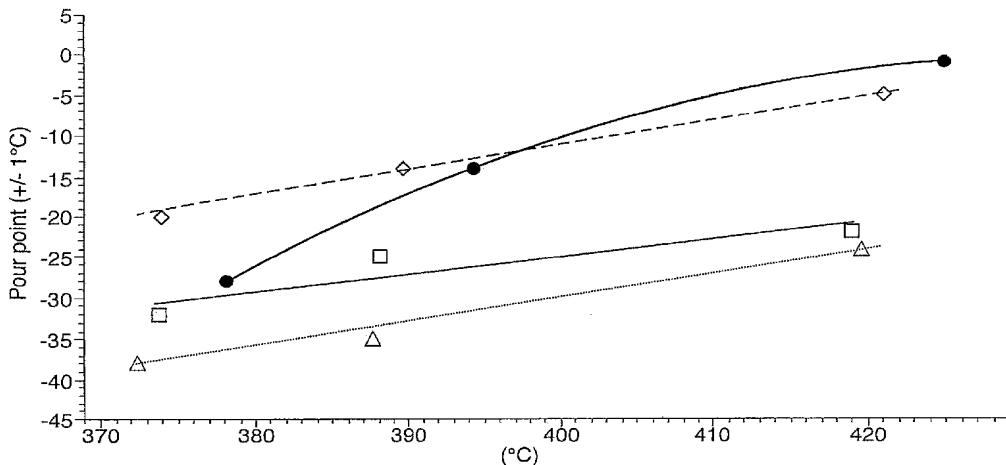

(57) Abstract: Process to prepare simultaneously two or more base oil grades and middle distillates from a mineral crude derived feed, in particular a de-asphalted oil or a vacuum distillate feed or their mixtures, by performing the following steps: (a) hydrocracking the mineral crude derived feed, thereby obtaining an effluent; (b) distillation of the effluent as obtained in step (a) into one or more middle distillates and a full range residue boiling substantially above 340 °C, (c) catalytically dewaxing the full range residue by contacting the residue with a dewaxing catalyst comprising a zeolite of the MTW type and a Group VIII metal, thereby obtaining a dewaxed oil; (d) isolating by means of distillation two or more base oil grades from the dewaxed oil obtained in step (c); and (e) isolating a dewaxed gas oil from the dewaxed oil obtained in step (c); wherein the dewaxed oil as obtained in step (c) comprises between 10 and 40 wt% of a dewaxed heavy gas oil boiling for more than 70 wt% between 370 and 400 °C.

WO 2005/085394 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*